

WVF-886 VENTLESS FRYER

VENTLESS COOKING SYSTEMS (VCS2000)



Specifications

Overall Dimensions:		Inches	MM
Width		42 3/8	1076
Depth		35 3/8	898
Height (incl. 6" legs)		77 3/16	1961
Shortening Capacity Per Fry Pot:		Lbs.	KG
F-886		15	7
Temperature Range:		Fahrenheit	Celsius
F-886		275° to 375°	135° to 191°
Pre-Heat Time to 350° F:		6 minutes	
Watts Per Hour to Maintain 350° F:		450	
Typical Production:		Per Hour	
French Fries (2-oz. servings)		600	
Chicken (pounds)		40	
Weights:		Lbs.	KG
Installed		700	318
Shipping		780	354

Export

The following models are available for export and meet the standards for CE:

- WVF-886EU, 380-415 3NAC, 3Ø, 12.0 KW
- WVF-886RWEU, 380-415 3NAC, 3Ø, 12.9 KW

Features

- **Ventless Hood System** exceeds EPA Standard 202 for the release of particulate matter.
- **Interlock System** will not allow fryer heating elements to be energized if the baffle, pre-filter or high efficiency filter is not in place.
- **Airflow Sensing System** continually monitors air flow through the filtration system, optimizing performance and grease removal. Built-in filter monitoring system indicates when filter replacement will soon be necessary.
- **Ansul® R-102 Fire Suppression System** is built into the ventless hood to provide ultimate protection.
- **Twin 15 lb. deep-drawn frypots** offer the flexibility of frying different products simultaneously.
- **Two full-size, rear hanging, interchangeable fry baskets** are provided.
- Features include **two automatic basket-lifting mechanisms** each controlled by a push-button, automatic reset timer.
- **Efficient heating elements** are flat, heavy-duty stainless steel.
- **The positive-off thermostats** control the element allowing for adjustable and more consistent temperatures.
- **Each frypot has a manual reset safety thermostat** that will shut off the heating element if an over-temperature condition is reached.
- **Unit is furnished with a Safety Test System** to enable periodic checks of the temperature-limiting thermostat.
- Model WVF-886RW includes a **Wells RW-26 built-in standard double drawer warmer** that replaces lower storage cabinet.
- The WVF-886 Ventless Fryer is Underwriters Laboratories, Inc. LISTED and meets the National Sanitation Foundation and Canadian standards.
- A **one-year warranty** against defects covers parts and labor.

Accessories / Options

Front-locking caster kit (field installed), 22650

Rear leg kit, 2 rear legs to be used when a remote fire pull station is field installed on WVF-886, 22616

Basket, half-size (2 per fry pot), 20161

Basket, full size (1 per fry pot), 20162

Crumb Cradle, 20690

Fry Pot Cover, 21010



WELLS MANUFACTURING




MODELS WVF-886, WVF-886RW WVF-886EU, WVF-886RWEU VENTLESS COOKING SYSTEM

DIMENSIONS:

INCH
(MM)

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE.			
BACK	SIDE	BOTTOM	TOP
NA	SEE REQUIRED SPACERS	6	8
NA		(152)	(203)

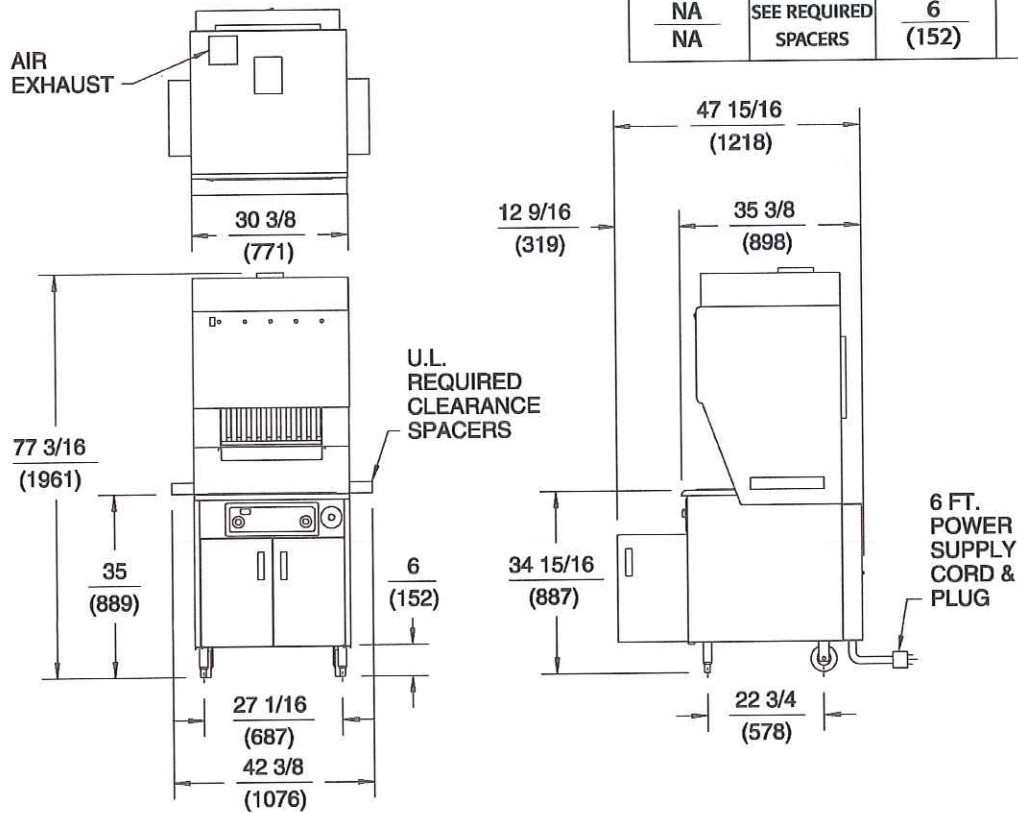

WVF-886 AND WVF-886RW ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS 3 PHASE				AMPS SINGLE PHASE	POWER SUPPLY CORD
			L1	L2	L3	N		
WVF-886	208	12000	33	33	33	-	NA	NEMA 15-60P
WVF-886	240	12000	29	28	29	-	NA	NEMA 15-60P
● WVF-886EU	380-415	12000	17	16	16	2	NA	NONE
WVF-886RW	208	12720	37	28	37	-	NA	NEMA 15-60P
WVF-886RW	240	12900	33	28	33	-	NA	NEMA 15-60P
● WVF-886RWEU	380-415	12900	21	16	16	6	NA	NONE

NOTE: Specifications are subject to change without notice.

● Denotes export (EU) products.

SPECIAL ENVIRONMENTAL NOTICE: The hood system is designed to reduce odor emissions but will not eliminate odors. Air exchange at the installation site must comply with requirements of the local jurisdictional authority. To ensure dilution of odor build-up, minimum recommendation is 400 cubic feet of fresh air per minute both in and out of the area.

Wells Bloomfield, LLC
10 Sunnen Dr, St. Louis, MO 63143 U.S.A.
U.S.A.: (888) 356-5362 · Main Fax (800) 264-6666
Canada & Export : (314) 781-2777 · (800) 264-7827 · Fax (314) 781-3636
www.wellsbloomfield.com



[Login](#) | [Catalog Quick Order](#) | [Email Signup](#) | [Contact Us](#) | [My Account](#)[Send My Free Catalog](#)[0 items \\$0.00](#)

Search 43,000 Products

[Search](#)[Refrigeration](#)[Pizza and
Concessions](#)[Furniture](#)[Food
Preparation](#)[Shelving Carts
and Racks](#)[Dishwashing
Sanitation](#)[Cooking
Equipment](#)[Dining Room](#)[Sale Items](#)[Clearance](#)See all: [Cooking Equipment](#) See all: [Commercial Deep Fryers](#) See all: [Commercial Electric Fryers](#) See all: [Wells Commercial Electric Fryers](#)

Commercial Electric Fryer - Ventless, 30 lb. Capacity

Consistent Temperatures[Specs](#)[Zoom](#)**FREE
SHIPPING****SHIPPING: FREE**
Your Cost: \$16,720.00
Each

Make your selection to see the final price

SELECT VOLTAGE Quantity: [Submit Query](#)**Qualifies for:**[Free Shipping](#)[Lease for as little as \\$533.87/month*](#)

Model#: 545-021

Brand: [Wells](#)

Mfg Part#: WVF-886



0.0

Be the first to [Write a Review](#)[Product Details](#)[Specifications](#)[Reviews](#)[Accessories](#)

Electric fryer is completely self contained. Ventless hood system exceeds EPA standard. Airflow sensing system monitors air flow to optimize performance and grease removal and indicate when filter replacement is necessary. Ansul R-102 fire suppression system built into the ventless hood to provide ultimate protection. Manual reset safety thermostat shuts off heating element if an unsafe temperature is reached.

Open pot design for easy cleaning. Stainless steel construction. Solid state controls. 30 lbs. total oil capacity. Twin 15 lb. capacity frypots, 11 $\frac{1}{8}$ "Wx16 $\frac{3}{4}$ "D each. 6" adjustable legs. 42 $\frac{3}{8}$ "Wx35 $\frac{1}{2}$ "Dx77 $\frac{7}{16}$ "H overall. Available in 208V or 240V, three phase. 12 KW. 780 lbs.

- 75 lbs. french fries per hour
- Two full size 9 $\frac{3}{16}$ "Wx5 $\frac{1}{16}$ "Dx7 $\frac{7}{16}$ "H fry baskets included
- +275°F to +275°F thermostat range
- 6' cord and plug included

About Central

[Contact Us](#)
[About Us](#)
[The Central Advantage](#)
[Visit Our Store](#)
[Career Opportunities](#)

Catalog/Email

[Request a Catalog](#)
[Join Our Email List](#)
[Download Our Catalog](#)

Policies

[Payment Options](#)
[Equipment Leasing](#)
[Shipping Policy](#)
[Returns Policy](#)
[Privacy Policy](#)
[Legal Disclaimers](#)

Need Help?

[Support Chat](#)
[FAQs](#)
[Helpful Hints](#)
[Knowledge Base](#)
[Site Map](#)

CENTRAL RESTAURANT PRODUCTS

800-215-9293

7750 Georgetown Rd
Indianapolis, IN 46268

Read our blog

[Follow us on Twitter](#)[Like us on Facebook](#)[Watch our YouTube videos](#)[Recommend Us](#)

© Central Products, LLC